



MAKE YOUR LIFE EASIER!



FPX-100 | Angle Die Grinder

Free Speed - 20.000 RPM
Air Consumption - 4 CFM
Noise Level - 89 dBA
Weight - 0.72 Kg
Height - 8.63 cm

Length - 18 cm
Collet Size - 6 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"



SPECIFICATIONS:

Free speed (RPM)	Air Consumption (CFM)	Noise level (dBA)	Weight (Kg)	Height (cm)	Length (cm)	Collet size (mm)	Air Inlet (in.)	Rec. Hose Size (in.)	MOQ
20.000	4	89	0.72	8.63	18	6	1/4	3/8	50

FPX-110 | 3/8" Composite Impact Wrench

Free Speed - 9.500 RPM
Square Drive - 3/8"
Impacts per Minute - 1.700 IPM
Max torque - 340 Nm

Weight - 1.20 Kg
Length - 16 cm
Air Consumption - 4 CFM
Max. Operating Pressure - 6.2 bar



SPECIFICATIONS:

Free speed (RPM)	Square Drive	Impacts per Minute (IPM)	Max torque (Nm)	Weight (Kg)	Length (cm)	Air Consumption (CFM)	Max. Operating Pressure (bar)	MOQ
9.500	3/8"	1.700	340	1.20	16	4	6.2	40

FPX-130 | 1/2" Aluminum Impact Wrench

Free Speed - 9.000 RPM
Square Drive - 1/2"
Impacts per Minute - 1.200 IPM
Max torque - 680 Nm

Weight - 2.5 Kg
Length - 19 cm
Air Consumption - 5 CFM
Max. Operating Pressure - 6.2 bar



SPECIFICATIONS:

Free speed (RPM)	Square Drive	Impacts per Minute (IPM)	Max torque (Nm)	Weight (Kg)	Length (cm)	Air Consumption (CFM)	Max. Operating Pressure (bar)	MOQ
9.000	1/2"	1.200	680	2.5	19	5	6.2	50

FPX-140 | 1/2" Composite Impact Wrench

Free Speed - 7.500 RPM
Square Drive - 1/2"
Impacts per Minute - 1050 IPM
Max torque - 880 Nm

Weight - 2.1 Kg
Length - 19 cm
Air Consumption - 5 CFM
Max. Operating Pressure - bar



SPECIFICATIONS:

Free speed (RPM)	Square Drive	Impacts per Minute (IPM)	Max torque (Nm)	Weight (Kg)	Length (cm)	Air Consumption (CFM)	Max. Operating Pressure (bar)	MOQ
7.500	1/2"	1050	880	2.1	19	5	6.2	50

FPX-200 | Straight Cut-Off Tool

Free Speed - 20.000 RPM
Air Consumption - 4 CFM
Noise Level - 88 dBA
Weight - 0.52 Kg
Height - 8 cm

Length - 15 cm
Disk / Wheel Size - 75 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"




SPECIFICATIONS:

Free speed (RPM)	Air Consumption (CFM)	Noise level (dBA)	Weight (Kg)	Height (cm)	Length (cm)	Disk / Wheel Size (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
20.000	4	88	0.72	8.63	18	75	1/4	3/8	40

FPX-250 | 3/8" Composite Ratchet Wrench

Free Speed - 160 RPM
Square Drive - 3/8"
Max torque - 70 Nm
Weight - 1.13 Kg

Length - 26 cm
Air Consumption - 4 CFM
Max. Operating Pressure - 6.2 bar

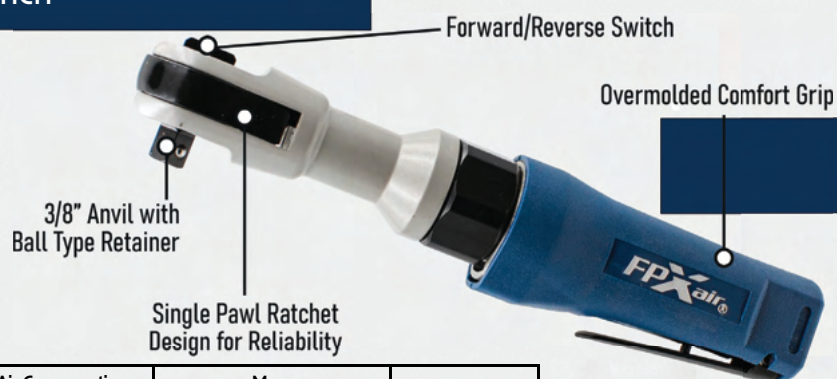

SPECIFICATIONS:

Free speed (RPM)	Square Drive	Max torque (Nm)	Weight (Kg)	Length (cm)	Air Consumption (CFM)	Max. Operating Pressure (bar)	MOQ
160	3/8"	70	1.13	26	4	6.2	40

FPX-300 | Straight Die Grinder

Free Speed - 25.000 RPM
Air Consumption - 4 CFM
Noise Level - 94 dBA
Weight - 0.40 Kg
Height - 4 cm

Length - 15 cm
Collet Size - 6 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"



SPECIFICATIONS:

Free speed (RPM)	Air Consumption (CFM)	Noise level (dBA)	Weight (Kg)	Height (cm)	Length (cm)	Collet size (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
25.000	4	94	0.40	4	15	6	1/4	3/8	50

FPX-310 | Composite Die Grinder

Free Speed - 22.000 RPM
Motor - 0.50 HP
Air Consumption - 3.5 CFM
Weight - 0.60 Kg

Length - 18 cm
Collet Size - 6 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"



SPECIFICATIONS:

Free speed (RPM)	Motor (HP)	Air Consumption (CFM)	Weight (Kg)	Length (cm)	Collet size (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
22.000	0.50	3.5	0.60	18	6	1/4	3/8	40

FPX-320 | Composite Angle Die Grinder

Free Speed - 20.000 RPM
Motor - 0.50 HP
Air Consumption - 3.5 CFM
Weight - 0.70 Kg

Length - 18 cm
Collet/Wheel Size - 6 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Free speed (RPM)	Motor (HP)	Air Consumption (CFM)	Weight (Kg)	Length (cm)	Collet size (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
20.000	0.50	3.5	0.70	18	6	1/4	3/8	40



FPX-330 | 3" Cut-Off Tool

Free Speed - 20.000 RPM
Motor - 0.50 HP
Air Consumption - 3.5 CFM
Weight - 0.70 Kg

Length - 18 cm
Disk/Wheel Size - 75 mm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Free speed (RPM)	Motor (HP)	Air Consumption (CFM)	Weight (Kg)	Length (cm)	Disk/Wheel Size (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
20.000	0.50	3.5	0.70	18	75	1/4	3/8	30



FPX-400 | Medium Stroke Air Hammer

Hammer Shank - 0.401"
Free Speed - 3.500 BPM
Air Consumption - 7 CFM
Noise level - 98 dBA
Weight - 1.10Kg

Height - 18 cm
Length - 15 cm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Hammer Shank (in.)	Free Speed (BPM)	Air Consumption (CFM)	Weight (Kg)	Height (cm)	Length (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
0.401	3500	7	1.10	18	15	1/4	3/8	50



FPX-410 | Medium Stroke Air Hammer

Hammer Shank - 0.401"
Free Speed - 3.500 BPM
Air Consumption - 7 CFM
Noise level - 98 dBA
Weight - 1.10Kg

Height - 18 cm
Length - 15 cm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Hammer Shank (in.)	Free Speed (BPM)	Air Consumption (CFM)	Noise Level (dBA)	Weight (Kg)	Height (cm)	Length (mm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
0.401	3500	7	98	1.10	18	15	1/4	3/8	50



FPX-440 | 3/8" Composite Drill

Free Speed - 1.800 RPM
Chuck Size - 3/8"
Air Consumption - 6.5 CFM
Weight - 0.90 Kg

Length - 19 cm
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Free speed (RPM)	Chuck Size (in.)	Air Consumption (CFM)	Weight (Kg)	Length (cm)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
1.800	3/8	6.5	0.90	19	1/4	3/8	30



FPX-500 | 3/8" Aluminum Ratchet Wrench

Free Speed - 200 RPM
Square Drive - 3/8"
Max torque - 75 Nm
Noise level - 96 dBA
Weight - 1.17 Kg

Height - 4.45 cm
Length - 26 cm
Air Consumption - 4 CFM
Air Inlet - 1/4" BSP
Rec. Hose Size - 3/8"

SPECIFICATIONS:

Free speed (RPM)	Square Drive (in.)	Max torque (Nm)	Noise Level (dBA)	Weight (Kg)	Height (cm)	Length (cm)	Air Consumption (CFM)	Air Inlet BSP (in.)	Rec. Hose Size (in.)	MOQ
200	3/8	75	96	1.17	4.45	26	4	1/4	3/8	40




FPX-520 | Syphon Feed Spray Gun

Cup Size - 1.000 CC
Spray Pattern - 1.1" - 11.5"
Tip Size - 1.8 mm
Air Consumption - 4 CFM

Weight - 1 Kg
Length - 17 cm
Max. Operating Pressure - 45 PSI

SPECIFICATIONS:

Cup Size (CC)	Spray Pattern (in.)	Tip Size (mm)	Air Cons. (CFM)	Weight (kg)	Length (cm)	Max. Operating Pressure (PSI)	MOQ
1.000	1.1" - 11.5"	1.8	4	1	17	45	50

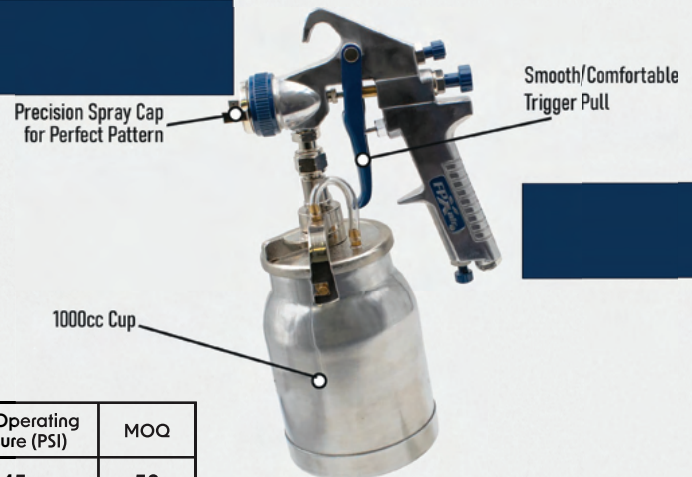


FPX-530 | Gravity Feed HVLP Spray Gun

Cup Size - 600 CC
Spray Pattern - 1.2" - 9.2"
Tip Size - 1.4 mm & 1.8 mm
Air Consumption - 4 CFM

Weight - 0.70 Kg
Length - 16 cm
Max. Operating Pressure - 40 PSI

SPECIFICATIONS:

Cup Size (CC)	Spray Pattern (in.)	Tip Size (mm)	Air Cons. (CFM)	Weight (kg)	Length (cm)	Max. Operating Pressure (PSI)	MOQ
600	1.2" - 9.2"	1.4 & 1.8 mm	4	0.70	16	40	50

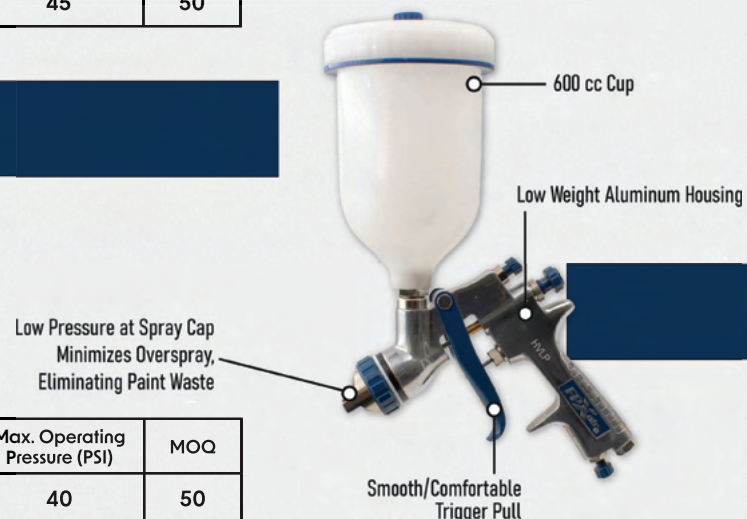

FPX-600 | Medium Stroke Air Hammer

Free Speed - 7.500 RPM
 Square Drive - 1/2"
 Noise Level - 95 dBA
 Max torque - 510 Nm
 Weight - 2 Kg

Height - 20 cm
 Length - 18 cm
 Air Consumption - 5 CFM
 Air Inlet - 1/4"
 Rec. Hose Size - 3/8"

One-hand forward/reverse mechanism



SPECIFICATIONS:

Free speed (RPM)	Square Drive (in.)	Noise Level (dBA)	Max torque (Nm)	Weight (Kg)	Height (cm)	Length (cm)	Air Consumption (CFM)	Air Inlet (in.)	Rec. Hose Size (in.)	MOQ
7.500	1/2	95	510	2	20	18	5	1/4	90	50

FPX-135K | 1/2" Impact Wrench + 3/8 Ratchet Kit

Kit Contents:



SPECIFICATIONS:

Model No.	Free speed (RPM)	Square Drive (in.)	Impacts Per Minute (IPM)	Max torque (Nm)	Weight (Kg)	Length (cm)	Air Consumption (CFM)	Max. Operating Pressure (PSI)	MOQ
FPX-130	9.000	1/2	1.200	680	2.5	19	5	90	30
FPX-250	160	3/8	N/A	70	1.13	26	4	90	

FPX-535K | Conventional & HVLP Gravity Spray Gun Kit

Cup Size - 600 CC
 Spray Pattern - 1.2" - 9.2"
 Tip Size - 1.4 mm
 Air Consumption - 4 CFM

Weight - 0,60 Kg
 Length - 16 cm
 Max. Operating Pressure - 40 & 50 PSI



SPECIFICATIONS:

Cup Size (CC)	Spray Pattern (in.)	Tip Size (mm)	Air Cons. (CFM)	Weight (kg)	Length (cm)	Max. Operating Pressure (PSI)	MOQ
600	1.2" - 9.2"	1.4	4	0,60	16	40 & 50	50



FPX-9125 | 1/4" x 25' PU air hose



FPX-9150 | 1/4" x 50' PU air hose



FPX-9325 | 3/8" x 25' hybrid air hose



FPX-9350 | 3/8" x 50' hybrid air hose



FPX-9525 | 1/2" x 25' hybrid air hose



FPX-9550 | 1/2" x 50' hybrid air hose