



Jiffy is now offering tools and attachments to drive Eddie Bolt® Fasteners.

The attachments are the Jiffy® Modular system the industry has come to demand, allowing fewer motor units and providing flexibility to the installation process.

Attachments are available in "L" Foot and 17° configurations with varying offsets to match the application. Socket drives are available for #5 thru #10 fasteners and length from Flush to 3". The Sockets and spline keys are interchangeable with product from Arconic® and can be used with their attachments. As always custom Kitting is available to match your application.



Carrying Case



Accessories

1-800-828-8665 U.S. and Canada
1-775-883-1072 International

2254 Conestoga Drive
Carson City NV 89706-0434

www.jiffyairtool.com



Offset Pistol - Straight Motors

Available in various horsepower to fit the applications.



Offset Pistol

"L" Foot



Indexable Heads



Straight



Attachments

Various attachment head styles "L" Foot and 17° Indexable heads to fit the application.
Heads are available in two edge radius configurations. .366 and .500



Series 2
Attachments for -5, -6, -8 Fasteners

Series 3
Attachments for -10 Fasteners




Original Style Spring Retainer

Permits interchangeability with Arconic® sockets and spline keys.





How to configure Jiffy's attachments to your application.

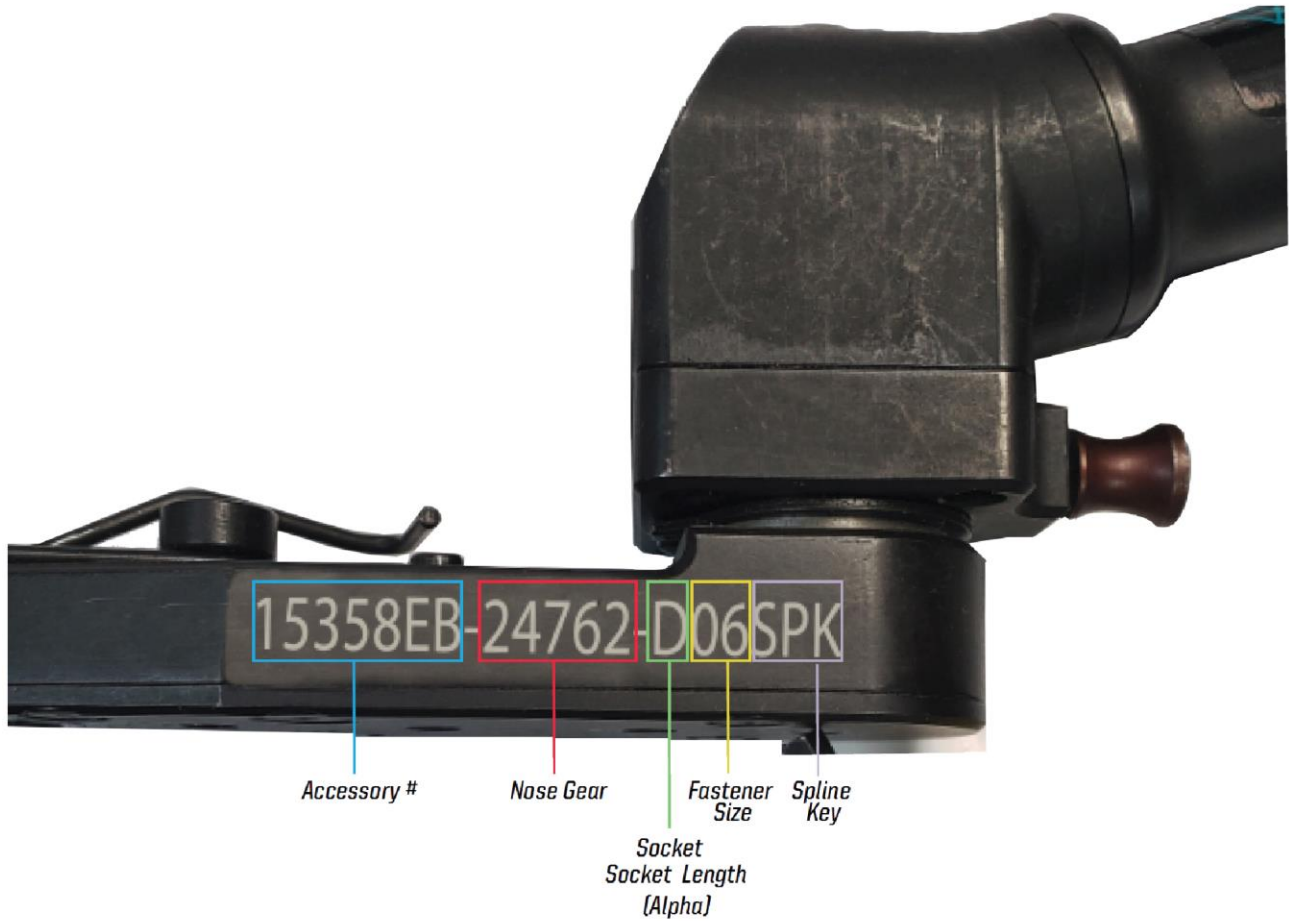




JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

JIFFY AIR TOOL

EDDIE BOLT[®] "MINI CATALOG"

JIFFY AIR TOOL ATTACHMENTS
THAT ARE CURRENTLY AVAILABLE


- USE SERIES 2 FOR EDDIE BOLT[®] -5, -6, -8 FASTENERS -
- USE SERIES 3 FOR EDDIE BOLT[®] -10 FASTENERS -

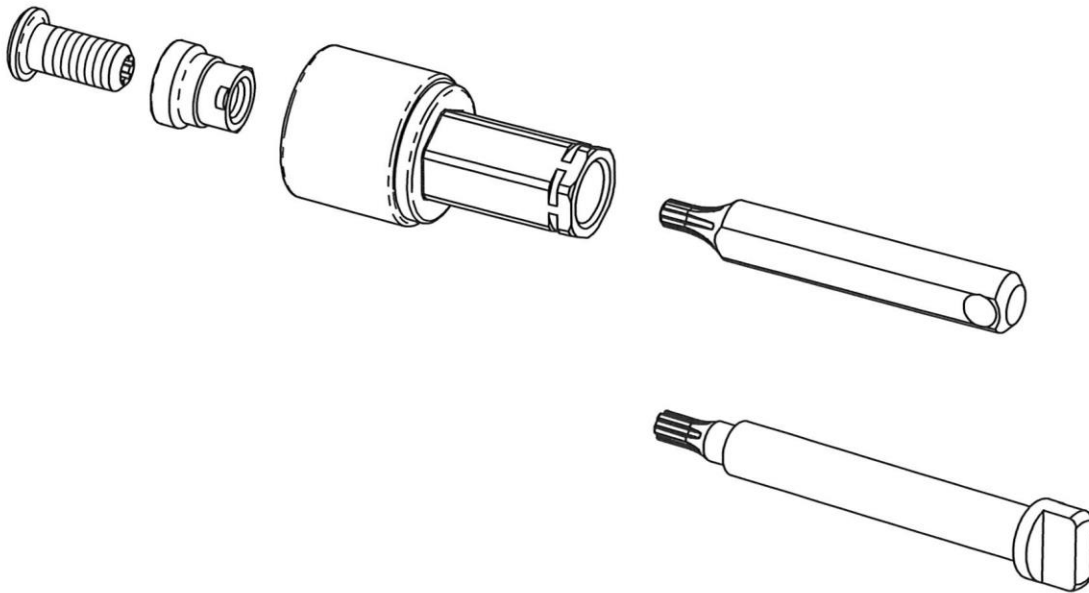

ATTACHMENTS WILL ACCEPT THESE SOCKETS AND KEYS, SHOWN.

15358 EB

SERIES 2 - R.366 NOSE
 17° INDEXABLE - 5 - GEAR

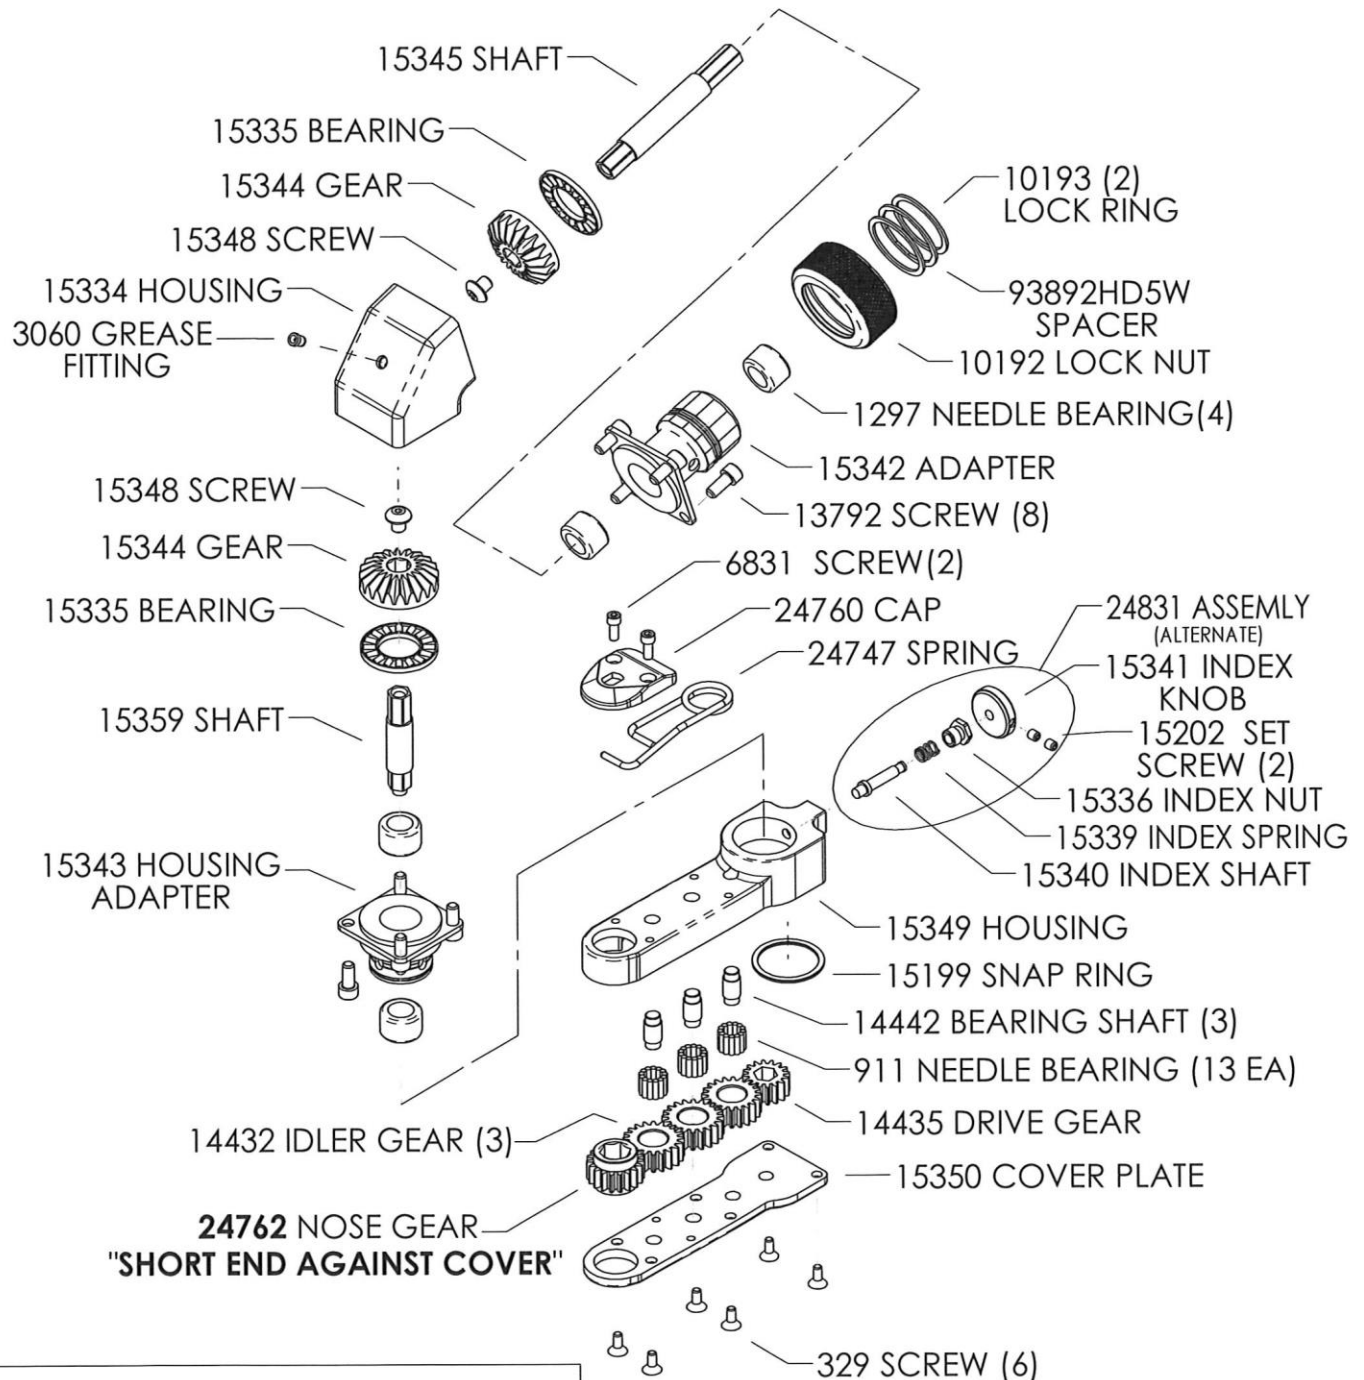

CHECK FUNCTION OF KEY CONTROL CAP AND SPRING: 100% - EVERY SINGLE ONE - USING A **24683** SOCKET AND **24642** KEY



JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com


19975 EB

ATTACHMENT - 17 DEGREE - INSTALLATION -
SERIES 3 - INDEXABLE - 5 GEAR - R.500 NOSE

ACCEPTS EDDIE BOLT® SOCKET AND KEY: **SIZE -10 ONLY:**


24191, 24192, 24194 (-10 SOCKETS JIFFY TYPE ONLY)

24667, 24668, 24669 (-10 KEYS ARCONIC TYPE)

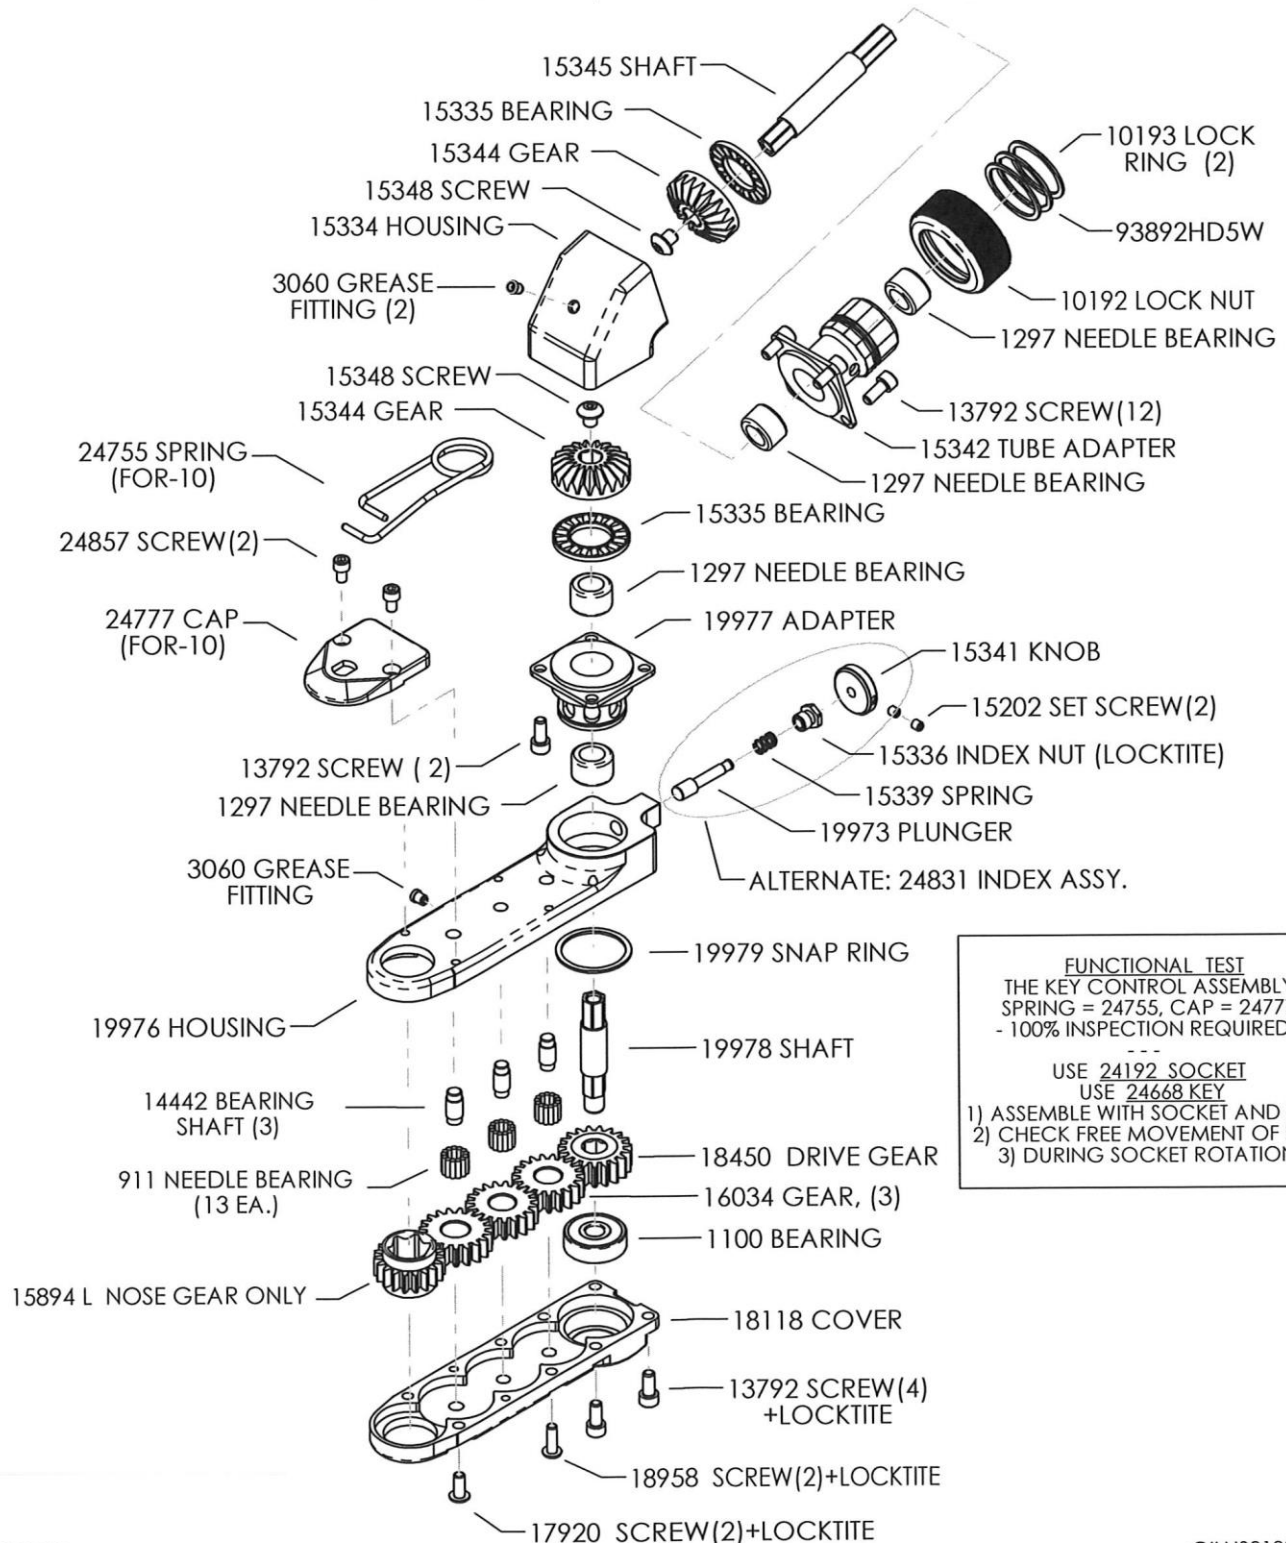

24981 EB

ATTACHMENT - L-TYPE - INSTALLATION - SERIES 2 - SHORT
.366 INCH / 9.3 MM CENTER - TO - EDGE DISTANCE
USES ONLY ARCONIC® TYPE KEYS :
24636, 24637, 24638, 24639 (-5)
24641, 24642, 24643, 24644 (-6)
24646, 24647, 24648, 24649 (-8)

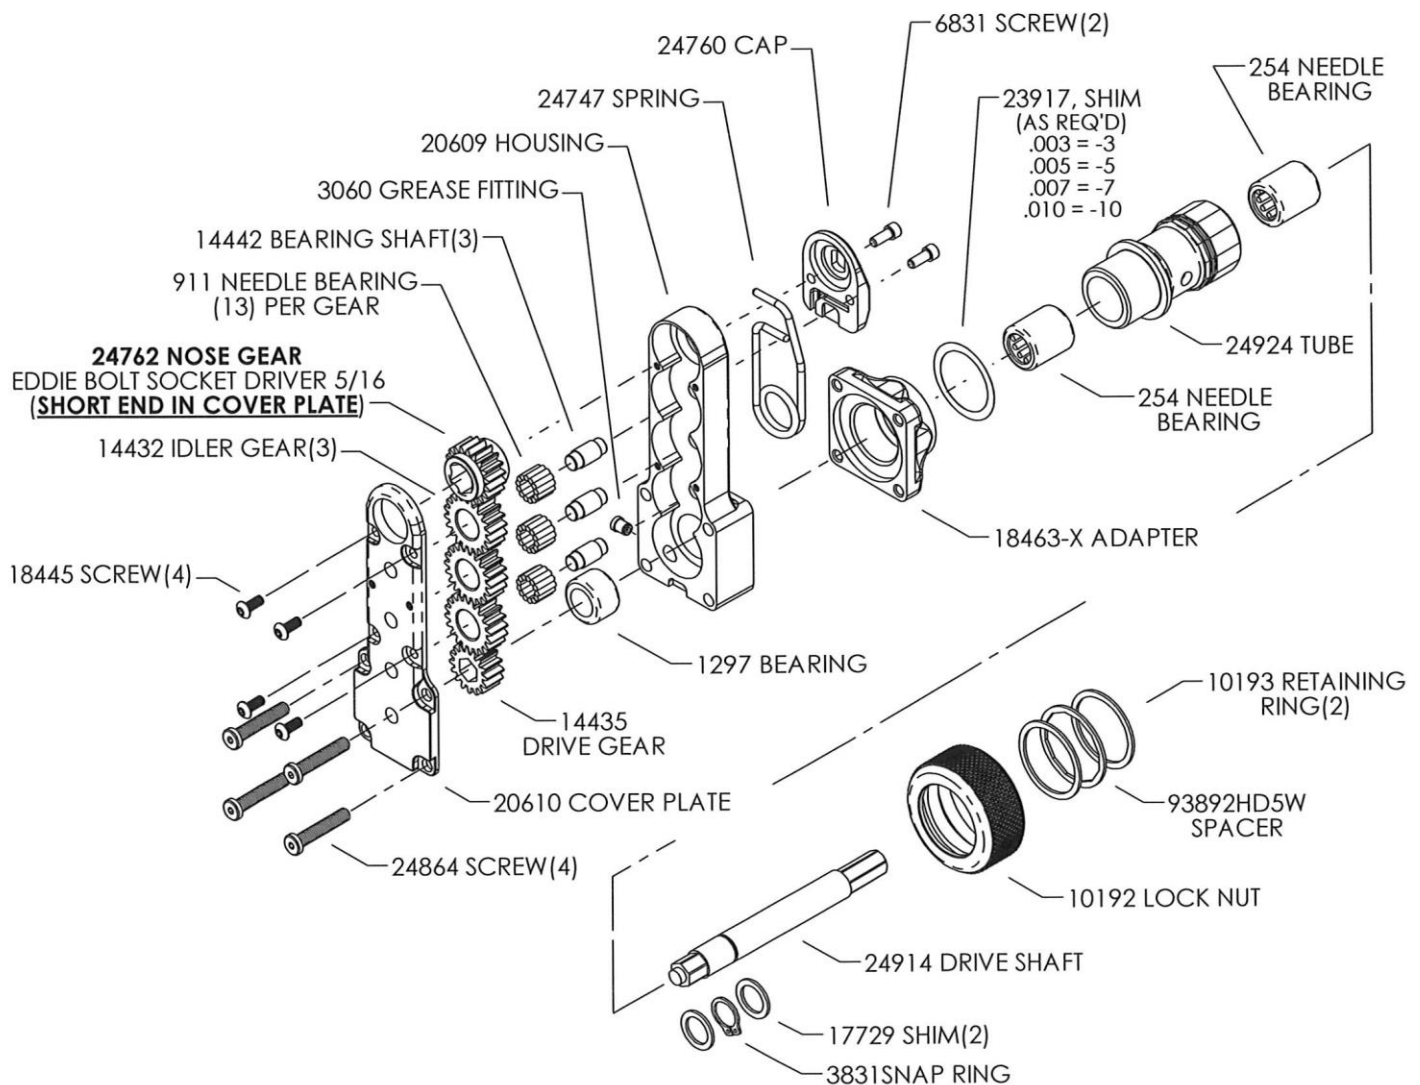

100% INSPECTION REQUIRED:

FUNCTIONAL TEST KEY CONTROL ASSEMBLY,
SPRING 24747, AND "CAP" 24760.
USE 24683 SOCKET
USE 24642 KEY
- ASSEMBLE WITH SOCKET AND KEY- CHECK FREE
MOVEMENT OF KEY DURING SOCKET ROTATION -




JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

18963 EB


ATTACHMENT - L - TYPE - INSTALLATION SERIES 3 - 5 GEAR - SHORT - R.500 NOSE

ACCEPTS JIFFY-AIR-TOOL-MADE EDDIE BOLT® SOCKET AND KEY: **SIZE -10 ONLY:**

24191, 24192, 24194 (-10 SOCKETS JIFFY TYPE ONLY)
24667, 24668, 24669 (-10 KEYS ARCONIC TYPE)

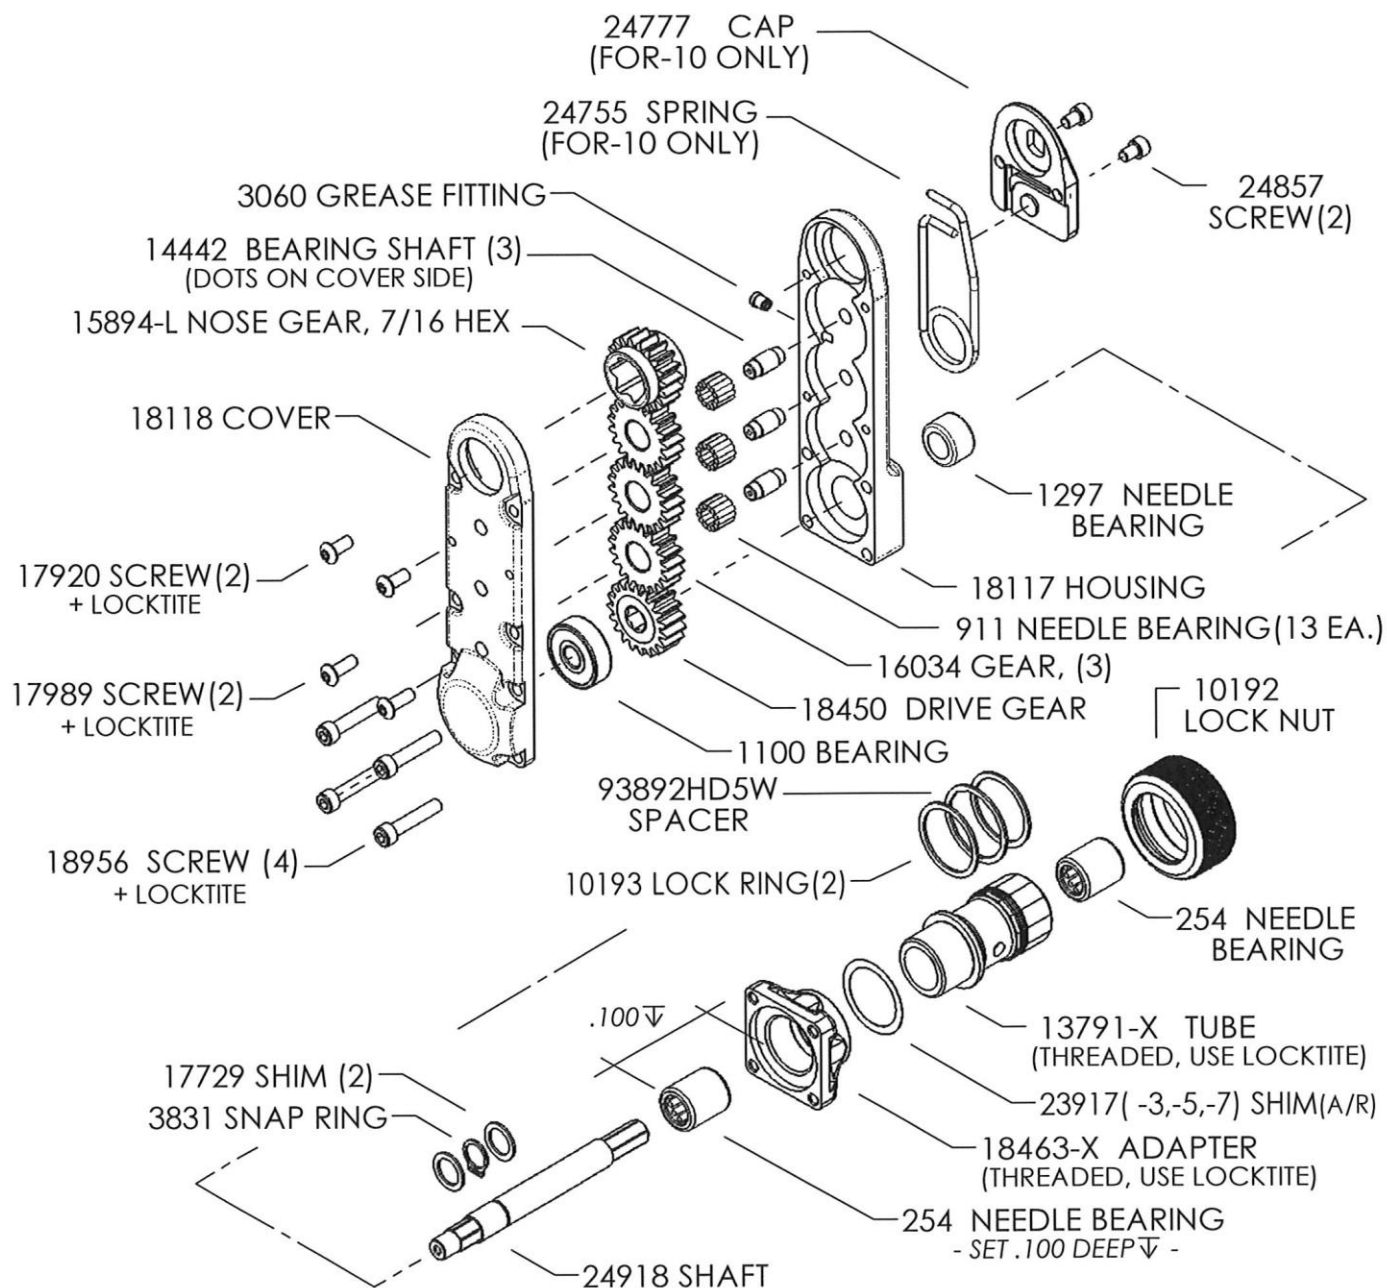




FUNCTIONAL TEST THE KEY CONTROL ASSEMBLY = 100% INSPECTION REQUIRED:
SPRING = 24755, AND CAP = 24777. USE 24192 SOCKET AND USE 24668 KEY
- ASSEMBLE WITH SOCKET AND KEY - CHECK FREE MOVEMENT OF KEY DURING SOCKET ROTATION -



TRI-RAD SOCKETS



NOTE: SOCKET APPEARANCE MAY DIFFER
DEPENDING ON COMPATIBLE MODEL

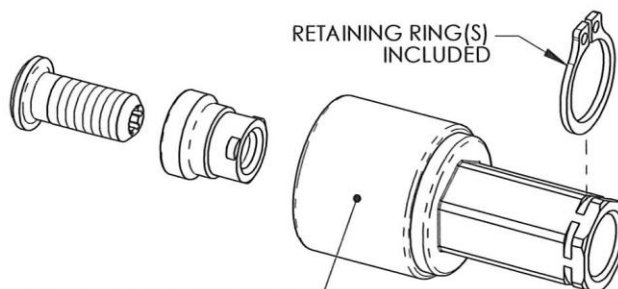

SOCKETS USED IN CONJUNCTION WITH
 MATCHING LENGTH SPLINE KEYS
 ON LISTED COMPATIBLE MODELS
 SEE "Cat-ARC_EB_SPLINE_KEYS"
 FOR AVAILABLE KEY SELECTION

COMPATIBLE MODELS: ETL1108, ETL1129, ETL1110, ETL1111, ETL1117, ETL3108, ETL3129, ETL3110, ETL3111, ETL3118

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-5	1/2"	463-9001	24677
	1.0"	463-9002	24678
	2.0"	463-9004	24679
	3.0"	463-9006	24680
-6	1/2"	463-9011	24682
	1.0"	463-9012	24683
	2.0"	463-9014	24684
	3.0"	463-9016	24685
-8	1/2"	463-9021	24687
	1.0"	463-9022	24688
	2.0"	463-9024	24689
	3.0"	463-9026	24690

COMPATIBLE MODELS: ET1015, ET1020

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	5/8"	463-9161	24692
	1.0"	463-9162	24693
	2.0"	463-9164	24694
	3.0"	463-9166	24695

COMPATIBLE MODELS: ET3472A, ET3492A

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	5/8"	463-9131	24697 *
	1.0"	463-9132	24698 *
	2.0"	463-9134	24699 *
	3.0"	463-9136	24700 *
-12	5/8"	463-9141	24702
	1.0"	463-9142	24703
	2.0"	463-9144	24704
	3.0"	463-9146	24705

COMPATIBLE MODELS: ET(L)2000, ET2000

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-5	2.0"	463-9600	24812
	3.0"	463-9601	24813
-6	2.0"	463-9602	24814
	3.0"	463-9603	24815
-8	2.0"	463-9604	24816
	3.0"	463-9605	24817

COMPATIBLE MODELS: ETL1115

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-5	1/2"	463-9051	24800
	1.0"	463-9052	24801
	2.0"	463-9054	24802
	3.0"	463-9056	24803
-6	1/2"	463-9061	24804
	1.0"	463-9062	24805
	2.0"	463-9064	24806
	3.0"	463-9066	24807

COMPATIBLE MODELS: ET1115

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-8	1/2"	463-9021	24808
	1.0"	463-9022	24809
	2.0"	463-9024	24810
	3.0"	463-9026	24811

COMPATIBLE MODELS: ET3100B08(*)08SPK


FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-8	5/8"	463-9121	24818
	1.0"	463-9122	24819
	2.0"	463-9124	24820
	3.0"	463-9126	24821

COMPATIBLE MODELS: ET3100B10(*)10SPK


FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	5/8"	463-9111	24822
	1.0"	463-9112	24823
	2.0"	463-9114	24824
	3.0"	463-9116	24825

COMPATIBLE MODELS: ET3100B12(*)SPK


FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-12	1.0"	463-9101	24826
	2.0"	463-9104	24827
	3.0"	463-9106	24828



SPLINE KEYS



NOTE: KEY APPEARANCE MAY DIFFER
DEPENDING ON COMPATIBLE MODEL

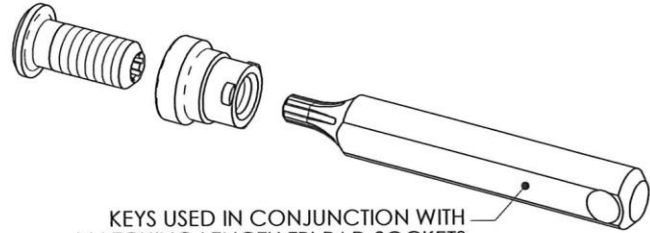

KEYS USED IN CONJUNCTION WITH
MATCHING LENGTH TRI-RAD SOCKETS
ON LISTED COMPATIBLE MODELS
SEE "Cat-ARC_EB_TRI-RAD_SOCKETS"
FOR AVAILABLE SOCKET SELECTION

COMPATIBLE MODELS: ETL1108, ETL1129, ETL1110,
ETL1111, ETL3108, ETL3129, ETL3110, ETL3111, ETL1115, ETL1117

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-5	FLUSH	493-9201	24635
	1/2"	493-9001	24636
	1.0"	493-9002	24637
	2.0"	493-9004	24638
	3.0"	493-9006	24639
-6	FLUSH	493-9202	24640
	1/2"	493-9011	24641
	1.0"	493-9012	24642
	2.0"	493-9014	24643
	3.0"	493-9016	24644
-8	FLUSH	493-9203	24645
	1/2"	493-9021	24646
	1.0"	493-9022	24647
	2.0"	493-9024	24648
	3.0"	493-9026	24649

COMPATIBLE MODELS: ET1015, ET1020

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	FLUSH	493-9204	24650
	5/8"	493-9161	24651
	1.0"	493-9162	24652
	2.0"	493-9164	24653
	3.0"	493-9166	24654

COMPATIBLE MODELS: ET(L)2000, ET2000

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-5	2.0"	493-9600	24790
	3.0"	493-9601	24791
-6	2.0"	493-9602	24792
	3.0"	493-9603	24793
-8	2.0"	493-9604	24794
	3.0"	493-9605	24795

COMPATIBLE MODELS: ET3472, ET3492

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	FLUSH	493-9204	24650
	5/8"	493-9131	24667
	1.0"	493-9132	24668
	2.0"	493-9134	24669
	3.0"	493-9136	24670
-12	5/8"	493-9141	24672
	1.0"	493-9142	24673
	2.0"	493-9144	24674
	3.0"	493-9146	24675

COMPATIBLE MODELS: ET3100

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-10	5/8"	493-9111	24656
	1.0"	493-9112	24657
	2.0"	493-9114	24658
	3.0"	493-9116	24659
-12	5/8"	493-9102	24661
	1.0"	493-9101	24662
	2.0"	493-9104	24663
	3.0"	493-9106	24664

COMPATIBLE MODELS: ET3100B08(*)08SPK

FASTENER DIA.	SOCKET LENGTH	ORIGINAL PART #	JIFFY PART #
-8	5/8"	493-9121	24796
	1.0"	493-9122	24797
	2.0"	493-9124	24798
	3.0"	493-9126	24799

NOTE: STRIKETHROUGH PARTS AVAILABLE AT LATER DATE




JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

JIFFY AIR TOOL

EDDIE BOLT[®] "MINI CATALOG"

JIFFY AIR TOOL ATTACHMENTS
THAT ARE CURRENTLY AVAILABLE


- USE SERIES 2 FOR EDDIE BOLT[®] -5, -6, -8 FASTENERS -
- USE SERIES 3 FOR EDDIE BOLT[®] -10 FASTENERS -

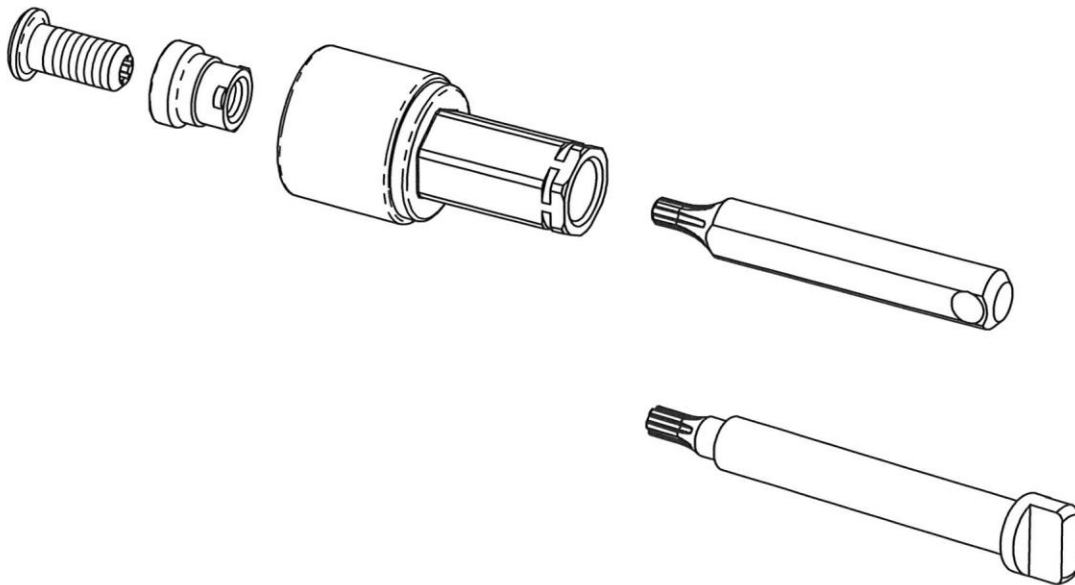

ATTACHMENTS WILL ACCEPT THESE SOCKETS AND KEYS, SHOWN.

15358 EB 2

SERIES 2 - R.366 NOSE 17° INDEXABLE - 5 - GEAR - SWINGARM

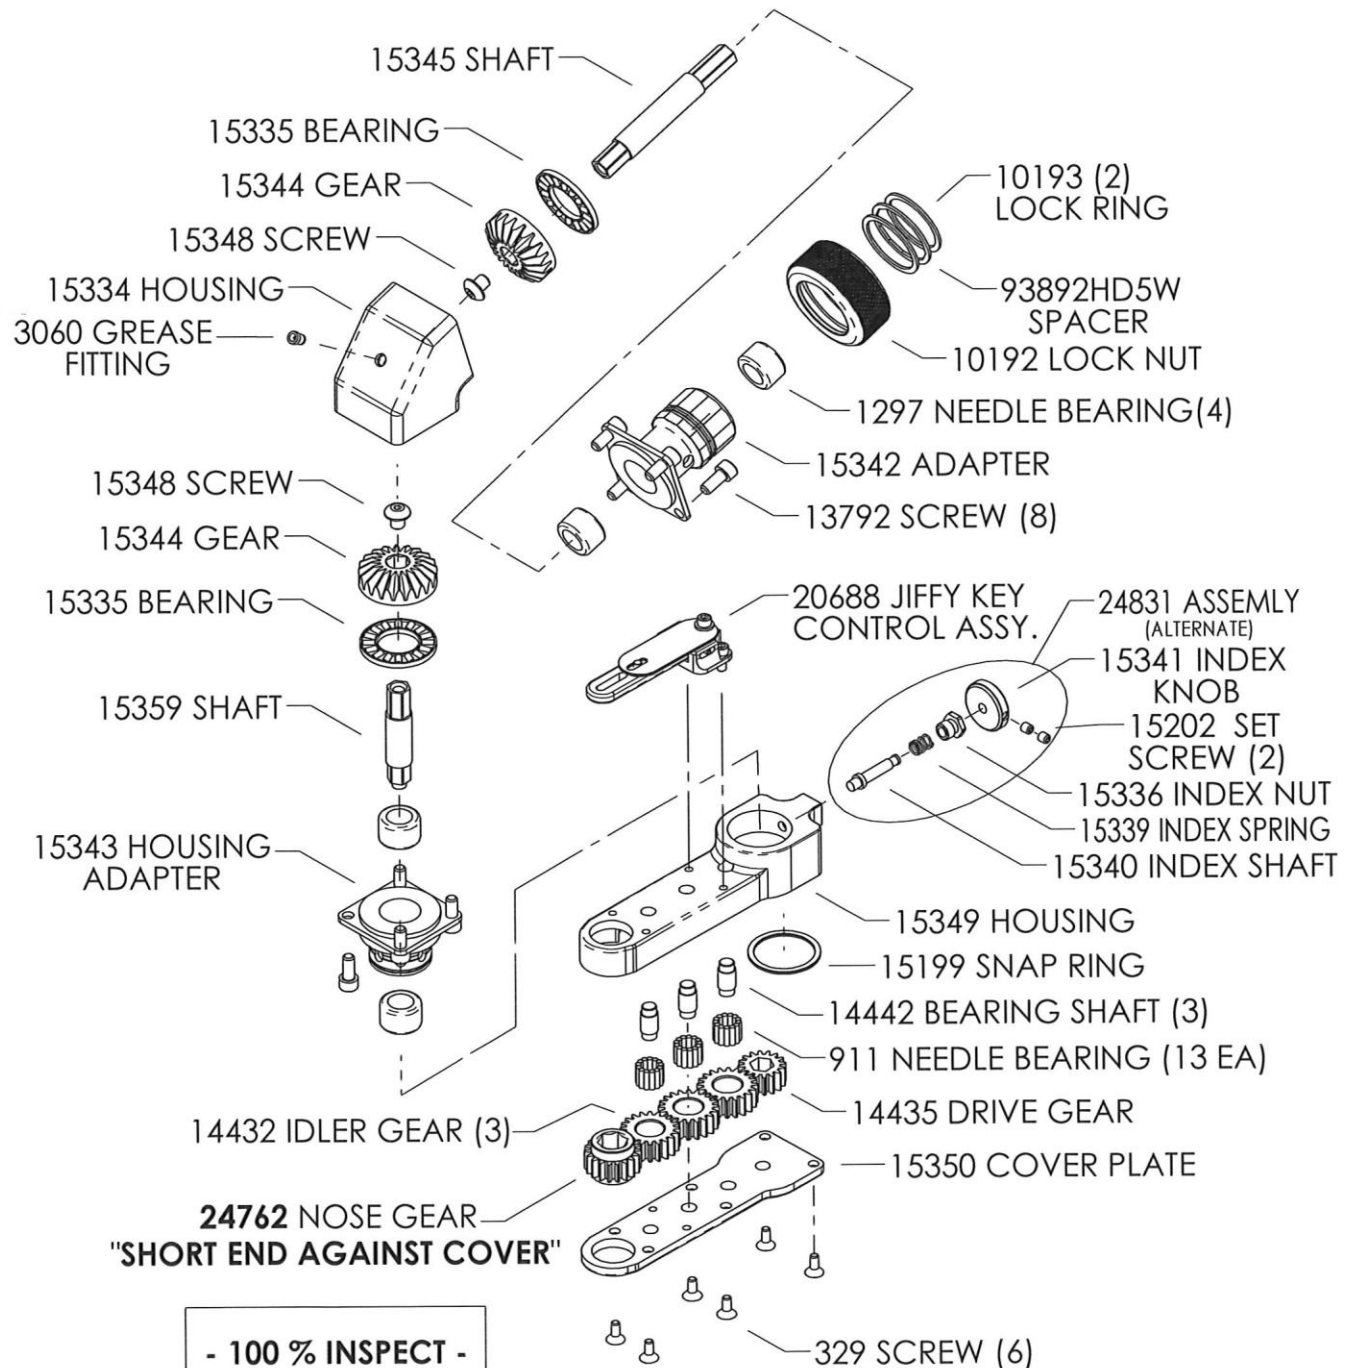

- 100 % INSPECT -

"THEN INSPECT AGAIN"



JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com


19975 EB2

ATTACHMENT - 17 DEGREE - INSTALLATION -
SERIES 3 - INDEXABLE - 5 GEAR - R.500 NOSE

ACCEPTS EDDIE BOLT® SOCKET AND KEY: **SIZE -10 ONLY:**

24191, 24192, 24194 (-10 SOCKETS, JIFFY TYPE ONLY)

24195, 24196, 24198 (-10 JIFFY SPLINE KEYS WITH TANG)

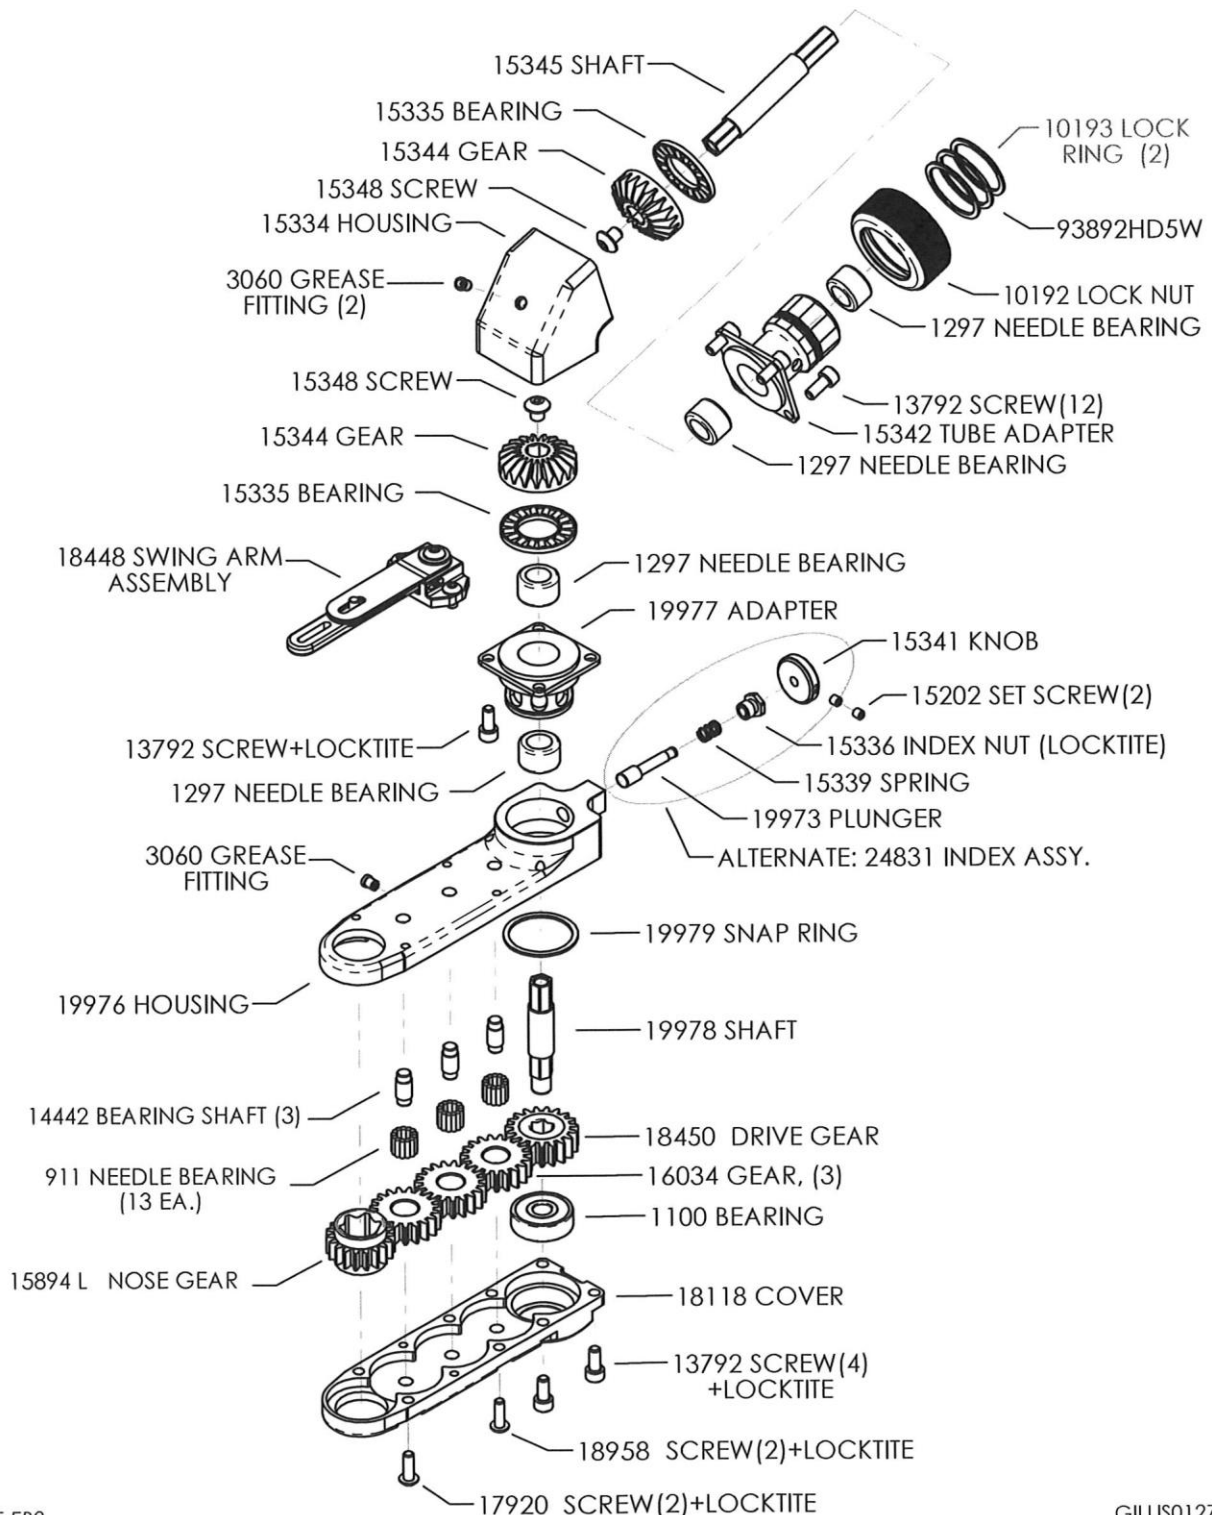




JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

19975 EB3

ATTACHMENT - 17 DEGREE - INSTALLATION -
SERIES 3 - INDEXABLE - 5 GEAR -R.500 NOSE

ACCEPTS EDDIE BOLT SOCKET AND KEY: **SIZE -10 ONLY:**
24191, 24192, 24194 (-10 SOCKETS JIFFY TYPE ONLY)
24667, 24668, 24669 (-10 KEYS ARCONIC TYPE)

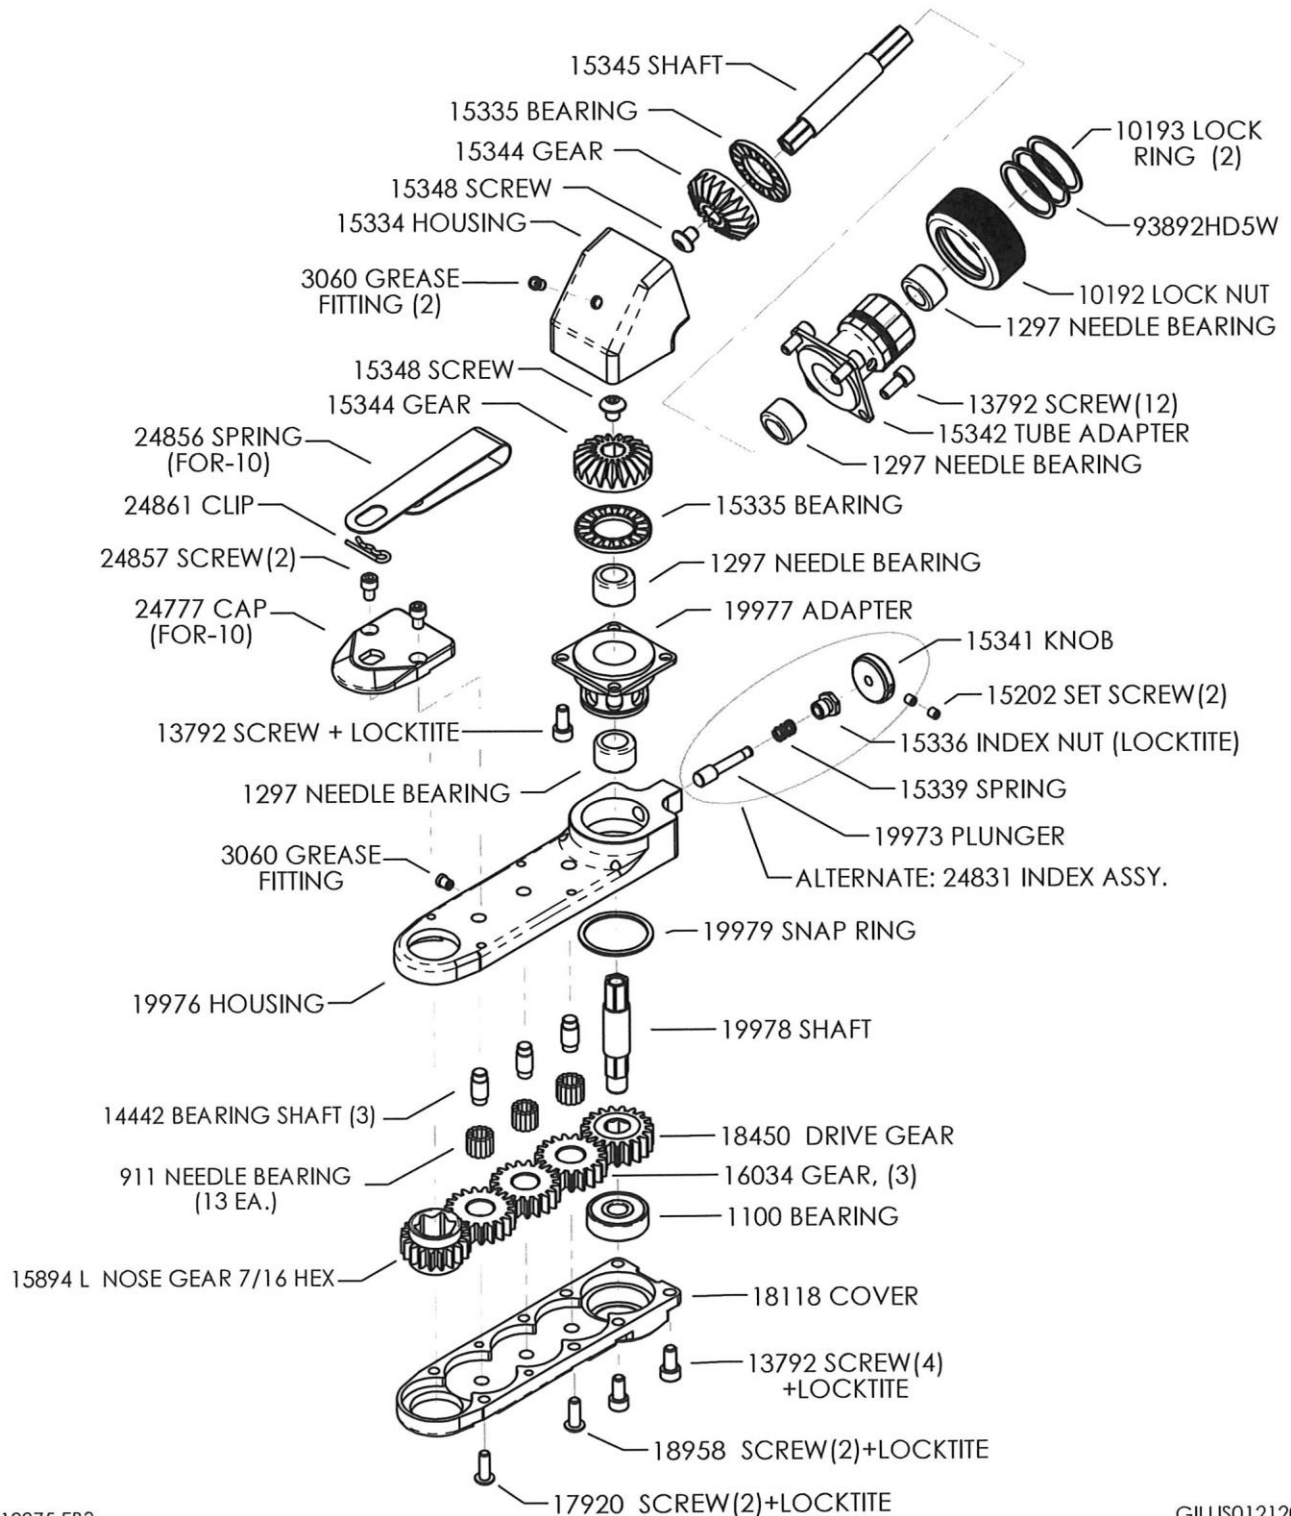




2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

24981 EB2

ATTACHMENT - SERIES 2 - L - TYPE - INSTALLATION - SHORT
.366 INCH / 9.3 MM CENTER - TO - EDGE DISTANCE
USES ONLY JIFFY SPLINE KEYS WITH TANG :

24262, 24263, 24265 (-5)
23615, 23616, 23618 (-6)
23629, 23630, 23634 (-8)

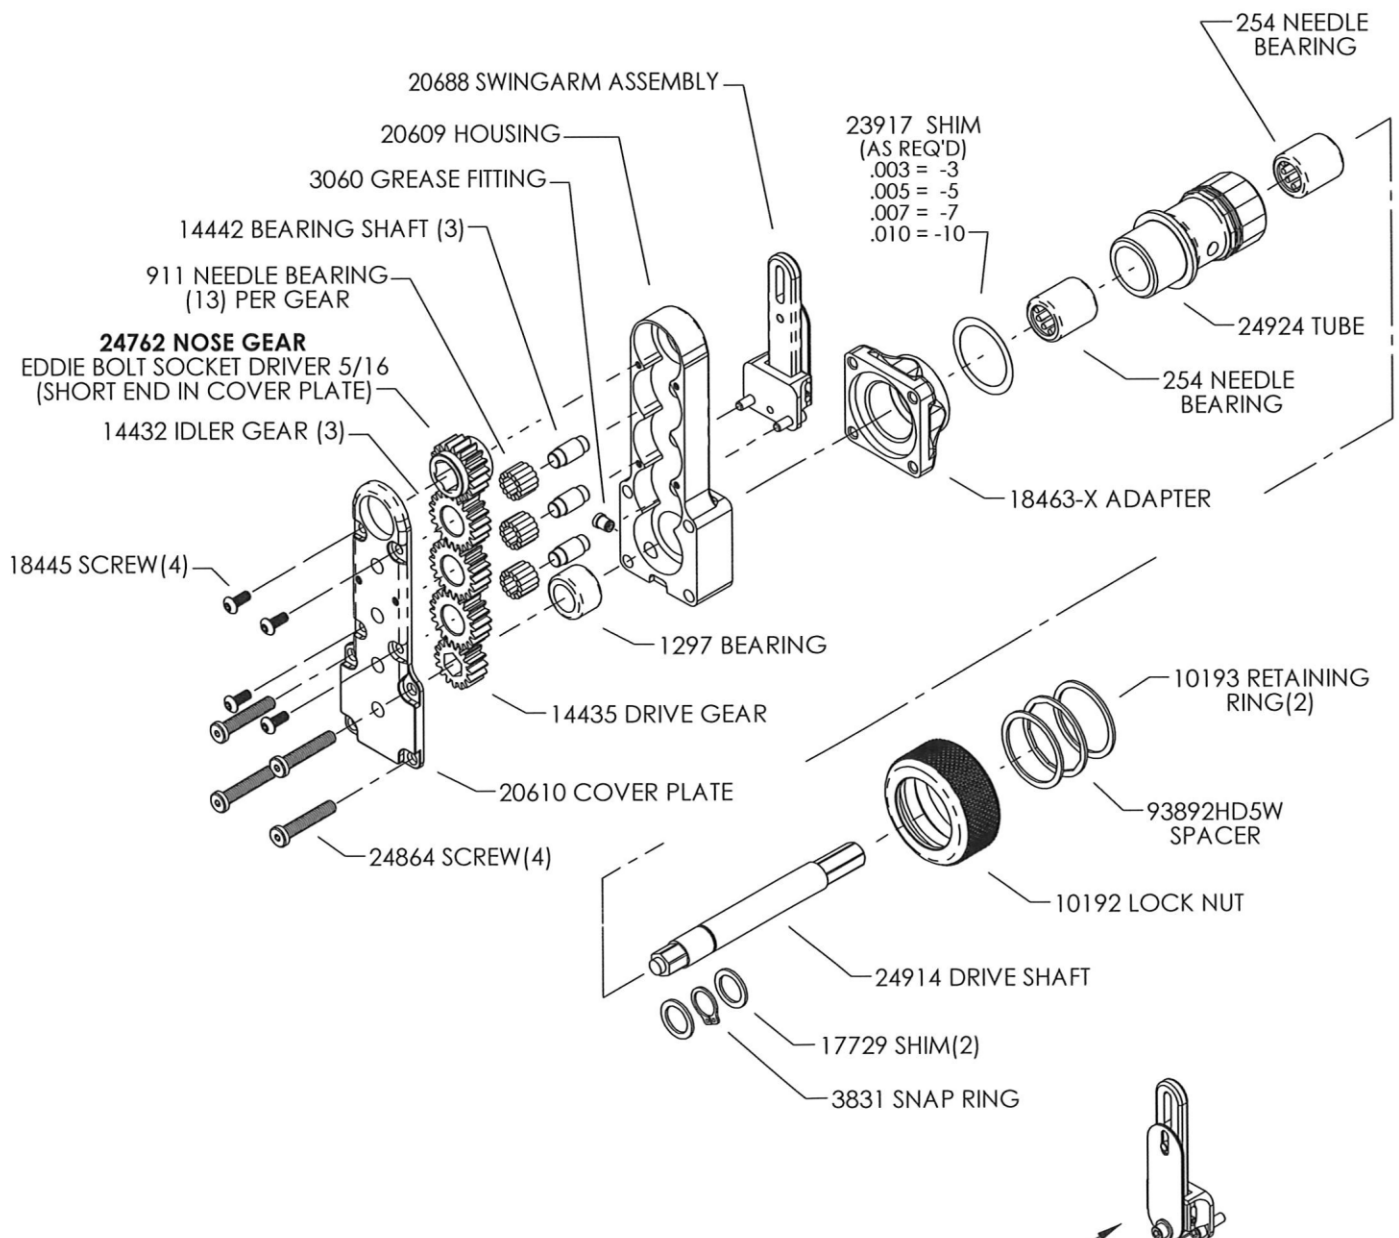

NOTE: **20764** JIFFY KEY CONTROL ASSEMBLY
FOR BACK-DRIVE IS AN OPTION
- MUST FLIP NOSE GEAR 180° -




2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

24981 EB2

ATTACHMENT - SERIES 2 - L - TYPE - INSTALLATION - SHORT
.366 INCH / 9.3 MM CENTER - TO - EDGE DISTANCE
USES ONLY JIFFY SPLINE KEYS WITH TANG :

24262, 24263, 24265 (-5)
23615, 23616, 23618 (-6)
23629, 23630, 23634 (-8)

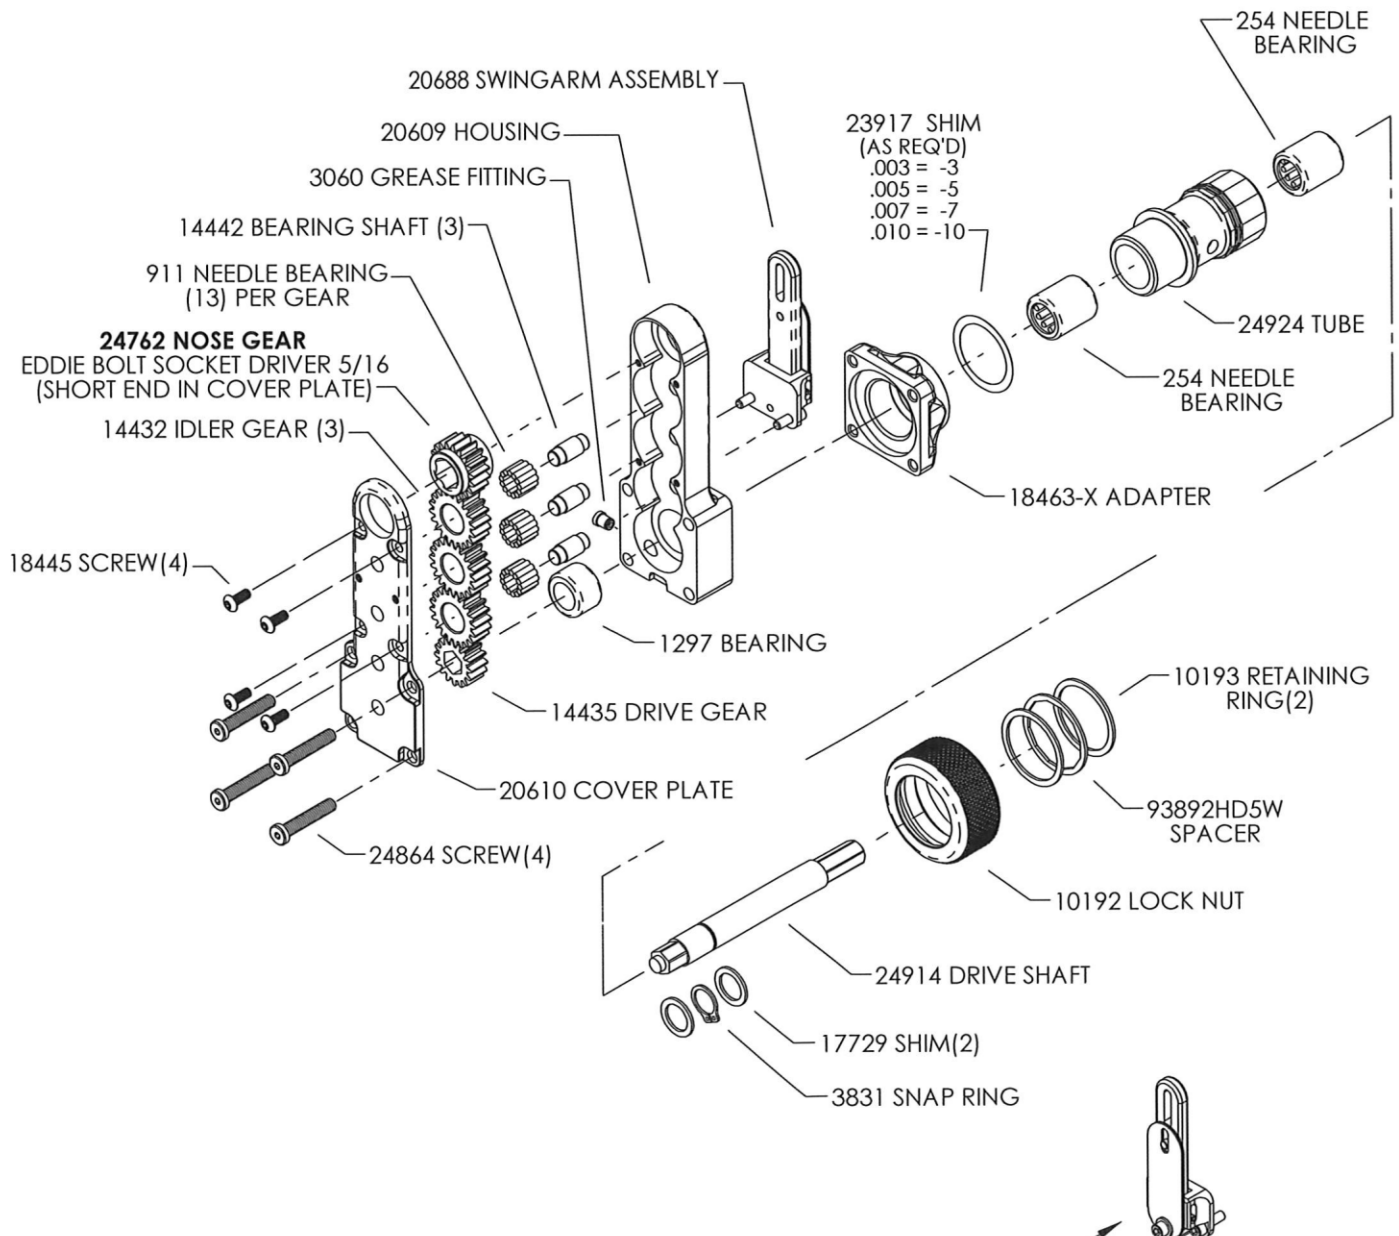

NOTE: **20764** JIFFY KEY CONTROL ASSEMBLY
FOR BACK-DRIVE IS AN OPTION
- MUST FLIP NOSE GEAR 180° -



JIFFY AIR TOOL INC.
2254 CONESTOGA DRIVE
CARSON CITY, NV 89706
775-883-1072
www.jiffyairtool.com

18963 EB3

ATTACHMENT - L - TYPE - INSTALLATION

SERIES 3 - 5 GEAR - SHORT

ACCEPTS EDDIE BOLT® SOCKET AND KEY: SIZE -10 ONLY:

24191, 24192, 24194 (-10 SOCKETS JIFFY TYPE)

24667, 24668, 24669 (-10 KEYS ARCONIC TYPE)

